

GRAFFITI GUARD

FOR EXTERIOR SURFACES


A water-based anti-graffiti protectant that prevents paint and stain adhesion on various surfaces.



FEATURES

-  ANTI-GRAFFITI & STAINS
-  EASY TO CLEAN
-  UV-RESISTANT
-  PRESERVES NATURAL LOOK


SUBSTRATES

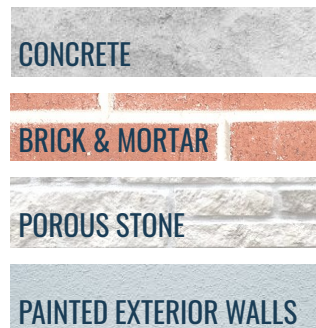

PREVENTATIVE MAINTENANCE



STAINED EXTERIOR FAÇADES

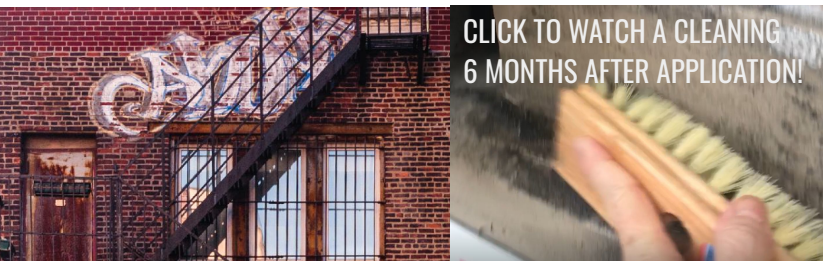

CLICK TO WATCH A CLEANING
6 MONTHS AFTER APPLICATION!

THE NANO-SCIENCE

ARMUS Graffiti Guard is a water-based, low VOC formulation that creates a stain-resistant 3D barrier on a surface from the inside out. Graffiti and paint stains are prevented from adhering permanently to the surface, making treated surface cleaning easy and cost-effective. Simply scrub using warm water and a stiff brush or steam clean.

APPLICATION

SURFACE PREP

- Wipe all surfaces clean of dust & debris.
- New substrates from cement and masonry should be cured > 4 weeks prior to application.
- Perform all repairs to damaged surfaces and fill any cracks, or holes by using the appropriate repairing material.

APPLICATION

- Shake well before application. No dilution is required.
- Apply by using spray, brush, or roller without runs, drips or spills.
- 2 coats recommended.
- Before full-scale application, test results in a small area.
- Maximum protection is achieved 1 week post-application.
- New stains should be cleaned within 1 week of appearing.
- Re-apply 1 coat of Graffiti Guard after every 5-7 washings.

ESTIMATED CONSUMPTION

- Up to 950 sq.ft. per gallon on polished surfaces.
- Up to 325 sq.ft. per gallon on unpolished porous surfaces.

SCAN QR CODE TO READ FULL TECHNICAL DATA SHEET BEFORE APPLYING.



SAFETY AND STORAGE

WARNING:

- Use in a well-ventilated area.
- Remove and wash contaminated clothing prior to reuse.
- Wear proper protective gear and clothing, eye or face protection prior to application.
- Combustible & flammable liquid. Keep away from heat or open flame. Do not smoke while using this product.

STORAGE & DISPOSAL

- Store indoors in a closed container in a well-ventilated area. Storage temperature should be between +50°F to 95°F (+10°C to +35°C).
- Protect from frost.
- Disposal of container and material safely according to local laws and regulations.

SCAN QR CODE TO READ FULL SAFETY DATA SHEET BEFORE APPLYING.

